

Ultra High Vacuum Feedthrough


BNC TYPE

インピーダンス50Ω、同軸タイプのフィードスルーです。
片側、両側脱着の2タイプに、各々フローティングの有無の組合せがあります。


50 Ω impedance matching and coaxial type feedthrough.
Single and both side conjunctive with floating option available.

unit : mm


BNC-R

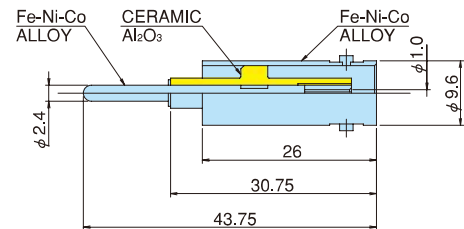


BNC-R-F

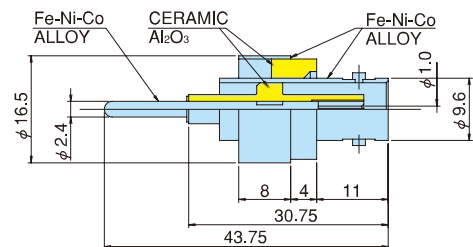

BNC-JJ

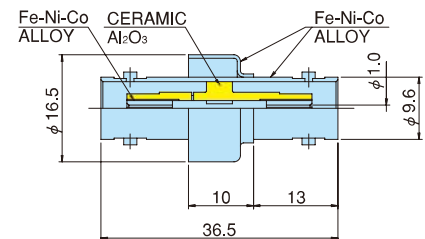

BNC-JJ-F

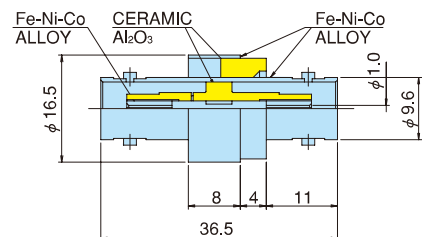

	BNC-R	BNC-R-F	BNC-JJ	BNC-JJ-F
Type	Coaxial	Coaxial-floating	Coaxial	Coaxial-floating
Part Number	16155	14516	15760	15759
Current:Amax.	3			
Voltage:D.CVmax.	D.C1,000			
Insulation:Ωmin.	10 ⁹			
Frequency:MHz	DCto100		DCto4,000	
Impedance:Ω	50			
Leak rate:1.3xPa・m3/s	10 ⁻¹⁰			
Bakeout Temp:°C	300			
Cooling	Liquid-N ₂			
Plug	BNC-P-3*1			

*1 DDK

Ultra High Vacuum Feedthrough


BNC TYPE

インピーダンス50Ω、同軸タイプのフィードスルーです。
片側、両側脱着の2タイプに、各々フローティングの有無の組合せがあります。


50 Ω impedance matching and coaxial type feedthrough.
Single and both side conjunctive with floating option available.

unit : mm


BNC-R-L-M2 SCREW

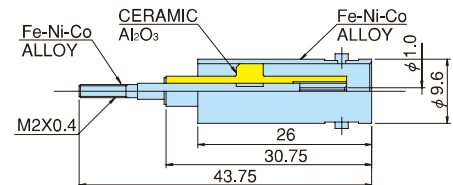


BNC-R-F-M2 SCREW

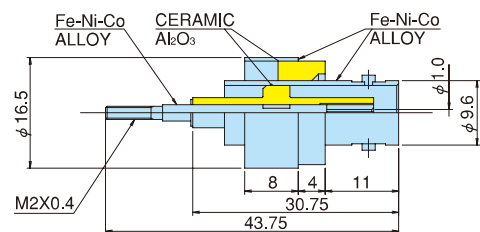

5KV-BNC-R

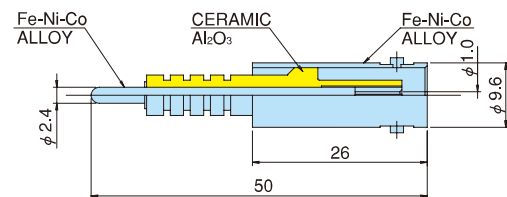

15KV-F-Coaxial

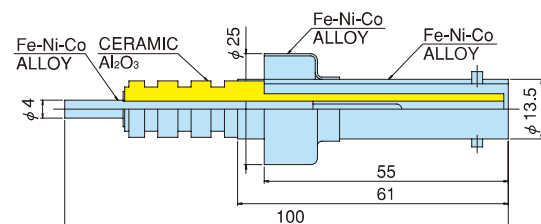

	BNC-R-L-M2 screw	BNC-R-F-M2 screw	5KV-BNC-R	15KV-F-Coaxial
Type	Coaxial	Coaxial-floating	Coaxial	
Part Number	17290	90166	94331	A5051
Current:Amax.	3		3	10
Voltage:D.CVmax.	D.C1,000		D.C5,000	D.C15,000
Insulation:Ωmin.	10 ⁹			
Frequency:MHz	DCto100			
Impedance:Ω	50			
Leak rate:1.3xPa・m3/s	10 ⁻¹⁰			
Bakeout Temp:℃	300			
Cooling	Liquid-N ₂			
Plug	BNC-P-3		11H4-50-4-4*2	

*2 SUHNER